




ImagePro 7300 Multi-use DLP Projector

- **Education**
- **Business**
- **Home Theater**

- Super 2000 to 1 Contrast Ratio
- Exceptional Video
- DLP™ technology by Texas Instruments
- 1600 lumen brightness
- SVGA resolution
- Monitor loopthrough
- Extremely easy to use

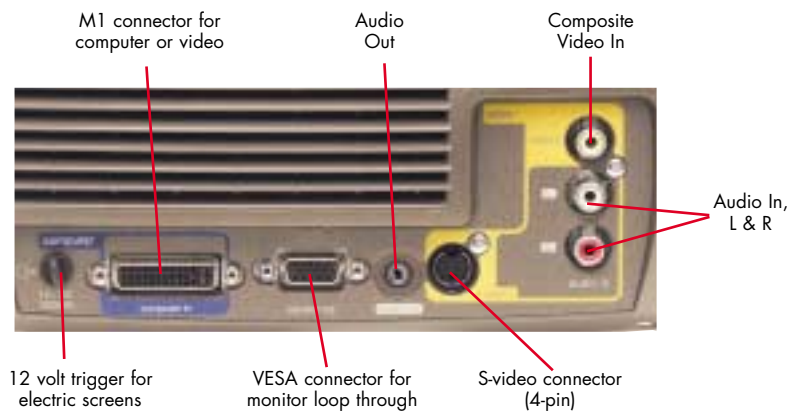

7300 DUKANE

ImagePro 7300 Multi-use DLP projector

Great Data and Super Video Images

The Dukane ImagePro 7300 is a DLP™ projector that works for business, instruction, or in your home. With a high contrast, 2000 to 1, and the latest digital video processor, the image is simply amazing. Plus, it is easy to use and transport at less than 7 lbs.

This revolutionary value projector has the image, connectivity, and features for everyone. Use it as a portable or mount it in the ceiling.



Key features:

- 1600 lumen brightness
- Vibrant color images
- 2000 to 1 contrast ratio
- Display in 4:3 or 16:9 aspect ratios
- Versatile with computer, and video inputs
- Simple setup and operation, color coded connections
- Compatible with all types of video including HDTV
- Component video input for the best images
- Extended 3000 hour lamp life
- Monitor output for use with a desktop computer's monitor
- Full function IR remote with mouse/cursor control
- Zoom lens for flexible projector placement
- One year warranty and one year POM program

7300 Distance Table

Image Size 4:3		Throw Distance	
Diagonal	Width	Min.	Max.
Inches	Inches	Feet	Feet
40	32	5.0	6.1
50	40	6.3	7.6
60	48	7.6	9.1
100	80	12.6	15.1
150	120	18.9	22.7
200	160	25.2	30.3

Throw ratio: 1.89-2.27:1 (distance:width)
Image offset is 112.2%

Specifications

Image Element	0.55" DDR DMD DLP by Texas Instruments
Brightness	1600 ANSI lumens (1100 lumens in Whisper Mode)
Resolution	800 x 600 pixels (H X V), SVGA
Contrast	2000 to 1
Scanning Frequency	fh 31.5-80 kHz, fv 50-85 Hz
Lens	Manual Zoom, 1.2X
Lens Throw Ratio	1.89-2.27:1 throw distance to image width
Keystone Correction	Digital, vertical +/-10 deg
Aspect Ratio	4:3, 16:9 selectable
Computer Compatibility	VGA, SVGA, XGA, and Mac 13" and Mac 16"
Video Compatibility	NTSC, PAL, SECAM, DVI HDTV (1080i, 720p, and 480p)
Image Control	Freeze function, electronic magnification and pan
Mouse Control	Using M1 to USB
Projection Modes	Front/rear/ceiling
Color Reproduction	24 bit (16.7 million)
Lamp	200W SHP
Lamp Life	3000 hours
Audio	1 speaker, 2.5 watt
Throw Distance	60" to 388"
Screen Size, diagonal	32" to 260"
Inputs	(1) M1-DA (computer & video sources) (1) S-video, Mini DIN 4-pin, (1) Composite video, RCA x 1 (2) Audio, Stereo, RCA (L/R)
Outputs	RGB, 15 pin, D-sub (monitor loop through) Audio out, Stereo mini jack 12V trigger for electric screens
Security	Kensington lock slot
Fan Level	39 dB normal, 37dB in Whisper Mode
Operating Temperature	41 to 104 deg. F (5-40 deg C)
Power	AC 100-240V, 50/60 Hz 200 watt (typical), 250 watt (max)
Size (WxHxD)	9.8" x 4.2" x 12.9"
Weight	6.8 lbs.
Shipping Weight	13 lbs.
Carton Size	14.5" x 14" x 18.5"
Accessories Included	Remote control, batteries, power cord, M1 to VGA/USB-A cable, composite video cable, user manual
Safety	UL/CSA, FCC Class B, CE
Optional Accessories	Lamp 456-7300 Rolling briefcase; 185-406, Ceiling mount, universal; PJF-UNV-S Softcase; 128-8755; Component to M1 adapter, SP-M1-ADPT

Two (2) year limited warranty

on parts and labor in North America, lamp excluded (for other locations, local warranties apply). Includes Dukane's FREE 12 month Peace-of-Mind Loaner Program.

2YR

imageworks
PRESENTATION EQUIPMENT SERVICES



1100 Irvine Blvd., #359
Tustin, CA 92780
www.eimageworks.com

Toll-free: 888-789-1917
Fax: 714-368-0421
E-mail: sales@eimageworks.com