




## ImagePro 8065 Portable LCD Projector

- 2000 lumen brightness
- SVGA resolution
- Lamp access on top & filter access in front
- Easy to transport, only 6.2 lbs.
- Monitor loophrough
- Remote mouse control
- HDTV ready

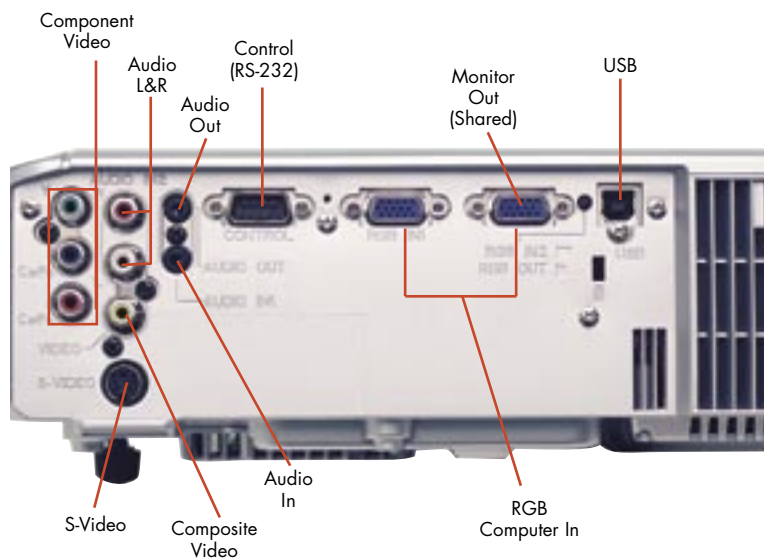

# 8065 DUKANE

# ImagePro 8065

## Portable LCD projector

The ImagePro 8065 is a portable LCD projector that can be used in a variety of applications. With sufficient brightness for most classrooms and conference rooms the 8065 is designed to be reliable and easy to maintain.

Lamp and filter access points are conveniently located and new security options make this projector a wise multimedia investment.



### Key features:

- SVGA (800 x 600) resolution
- 2000 ANSI lumens of brightness
- Easy maintenance in ceiling mount with lamp access on top & filter access in front
- Monitor loopthrough & remote mouse control
- Individual Audio - Source Assignment
- "Instant Off" Capability
- "Custom Image" for your startup and blank screens
- "Whisper Mode" so you hear only your message
- Vertical keystone correction
- HDTV ready & progressive scan
- Kensington lock slot & security bar
- Five Year Warranty and One Year Peace of Mind Service

8065 Projection Table

Image Size 4:3		Throw Distance	
Diagonal	Width	Min.	Max.
Inches	Inches	Feet	Feet
30	24	3.0	3.6
60	48	6.1	7.3
80	64	8.1	9.8
100	80	10.2	12.2
120	96	12.2	14.7
150	120	15.3	18.3
200	160	20.3	24.5
300	240	30.6	36.8

Throw Ratio (distance to width), 1.52 - 1.86

# DUKANE

Dukane Corporation  
 Audio Visual Products Division  
 2900 Dukane Drive  
 St. Charles, Illinois 60174  
 Toll-free: 800-676-2485  
 Fax: 630-584-5156  
 avsales@dukcorp.com  
 www.dukcorp.com/av



#11689-L-05

ImagePro is a registered trademark of Dukane Corporation

## Specifications

## 8065

Image Element	0.6" polysilicon active-matrix TFT x3
Brightness	2000 ANSI lumens (1600 lumens in Whisper Mode)
Resolution	800 x 600 pixels (H X V), SVGA
Contrast	400:1
Scanning Frequency	fh 15-106 kHz, fv 50-120 Hz
Lens	Manual zoom (F1.7 - 1.9), 1.2X
Lens Throw Ratio	1.52:1 - 1.86:1 throw distance to image width
Keystone Correction	Digital, vertical +/-15 deg
Aspect Ratio	4:3, 16:9 selectable
Computer Compatibility	SVGA, VGA, XGA, SXGA, UXGA Compressed PC and MAC13" and MAC16"
Video Compatibility	NTSC, NTSC4.43, PAL, SECAM, PAL-M, PAL-N, HDTV (1080i, 720p, 576i, 480i/p)
Component Video, Image Control	Freeze function, electronic magnification and pan
Mouse Control	Using USB
Projection Modes	Front/rear/ceiling
Color Reproduction	24 bit (16.7 million)
Lamp	180W UHB
Lamp Life	2000 hours (typical)
Audio	1 speaker 1 watt
Throw Distance	36" to 441"
Screen Size, diagonal	30" to 300"
Inputs, Video	(1) Component, RCA x 3 (1) S-video, Mini DIN 4-pin (1) Composite video, RCA x 1
Inputs, Computer	(2) RGB, 15 pin D-sub
Inputs, Audio	(1) Stereo mini jack (for RGB) (1) RCA x 2 (for video)
Outputs, Audio	(1) Stereo mini jack
Outputs, Monitor	RGB, 15 pin D-sub (share with RGB2 input)
Outputs, Control	RS-232, 9 pin D-sub USB Mouse control
Security	Kensington lock slot & Security Bar
Fan Level	38dB, ultra quiet 33dB in Whisper Mode
Operating Temperature	41-95 deg F
Power	AC 100-120V, AC 220-240V 50/60 Hz, 290 watt
Size (WxHxD)	12.0" x 3.4" x 9.8"
Weight	6.2 lbs.
Shipping Weight	16 lbs.
Carton Size	16" x 14" x 12"
Accessories Included	Remote control, batteries, power RGB cable, operators manual and soft carry case.
Safety	UL/C-UL, FCC Class B, CE
Optional Accessories	Lamp 456-8755D Ceiling Mount, Universal; RPA-U

Five (5) year limited warranty on parts and labor in North America, lamp excluded (for other locations, local warranties apply). Includes Dukane's FREE 1 year Peace-of-Mind Loaner Program.

# 5YR