




ImagePro 8746A Miniature Portable DLP projector

- Ultra Light, 2.4 lbs.
- XGA resolution
- 1400 lumens brightness
- Small, quiet
- Extremely easy to use

Two year warranty

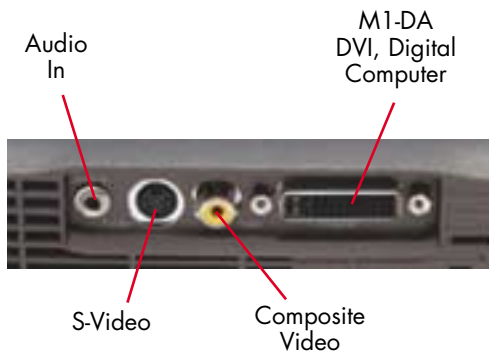

***Small, quiet, and portable.
Easy to use for traveling!***



8746A DUKANE

ImagePro 8746A Ultra portable DLP projector

A way to present your images anywhere

The Dukane ImagePro 8746A provides exceptional performance with tremendous portability. It's the ideal way to present rich, saturated color images from your PC or video source.

The projector is one-half the size of most laptop computers while providing a full set of features. Use it as your traveling companion or just as a fast way to collaborate with your associates.

Key features:

- Ultra light weight
- 1400 lumens brightness
- Crisp XGA resolution, with auto sizing image
- DVI connection for analog and digital images
- Full-function remote control with USB mouse operation
- Computer plus composite, and S-video inputs
- Only 2.4 lbs. in a miniature package
- 1.3X zoom lens for flexible projector placement
- Audio sound from built-in speaker



Projection throw distances for 4:3 Aspect, in inches (feet)

| Image Size in inches (feet) | | | MIN Throw | MAX Throw |
|-----------------------------|----------|----------|------------|------------|
| Diagonal | Width | Height | | |
| 60 (5.0) | 48 (4.0) | 32 (3.0) | 89 (7.4) | 113 (9.5) |
| 72 (6.0) | 57 (4.7) | 43 (3.6) | 107 (8.9) | 136 (11.4) |
| 84 (7.0) | 67 (5.6) | 50 (4.2) | 124 (10.4) | 159 (13.3) |
| 100 (8.3) | 80 (6.7) | 60 (5.0) | 148 (12.4) | 189 (15.8) |
| 120 (10.0) | 96 (8.0) | 72 (6.0) | 178 (14.9) | 227 (19.0) |

Minimum distance to screen is 59 inches (4.9 feet)
Image offset 110%

Specifications

| | |
|------------------------|---|
| Image Element Type | 0.7" DMD, DDR, Digital Micromirror Device DLP by Texas Instruments, XGA |
| Brightness | 1400 ANSI lumens |
| Resolution | 1024 x 768 pixels (H x V) |
| Contrast | 1100:1 |
| Scanning Frequency | fh 15-100 kHz, fv 43.5-130 Hz |
| Lens | Manual zoom 1.3X |
| Lens Throw Ratio | 1:8 to 2.4:1 width to throw distance |
| Keystone Correction | Digital, +/- 15 degrees |
| Aspect Ratio | 4:3, 16:9, selectable |
| Computer Compatibility | SVGA, VGA, XGA, SXGA |
| Video Compatibility | PC and Mac NTSC, PAL, SECAM, SDTV (480i), EDTV (480p) |
| Image Control | Freeze function, electronic magnification, pan and Picture-in-Picture |
| Mouse Control | Using M1 to USB |
| Projection Modes | Front/rear |
| Color Reproduction | 24 bit (16.7 million) |
| Lamp | 120W UHP |
| Lamp Life | 3000 hours (typical) |
| Audio | 1 speaker, 1 watt |
| Throw Distance | 5 to 35 ft. |
| Screen Size | 2.7 to 22.2 ft. |
| Inputs, Video | (1) Min DIN 4-pin, s-video (1) RCA, composite video (1) DVI, M1D/A, VESA with USB mouse (1) Audio, stereo mini jack |
| Inputs, Computer | Kensington lock slot |
| Security | 32dB, ultra quiet |
| Fan Level | 5 to 40 degrees C |
| Operating Temperature | AC 100-240V, 50/60 Hz, 155 watt |
| Power | 7.8" x 2.5" x 6.1" |
| Size (WxHxD) | 2.4 lbs. |
| Weight | 10 lbs. |
| Shipping Weight | 11.8" x 12.2" x 13.2" |
| Carton Size | Remote control, batteries, power cord, RCA video cable, DVI cable with USB, audio cable (stereo mini), and operator's manual. |
| Accessories Included | UL/CSA, FCC Class B |
| Safety | Lamp 456-241; rolling briefcase; 185-406 |
| Optional Accessories | |

Two (2) year limited warranty

on parts and labor in North America, lamp excluded (for other locations, local warranties apply). Includes Dukane's FREE 12 month Peace-of-Mind Loaner Program.

2YR

imageworks
PRESENTATION EQUIPMENT SERVICES

1100 Irvine Blvd., #359
Tustin, CA 92780
www.eimageworks.com

Toll-free: 888-789-1917
Fax: 714-368-0421
E-mail: sales@eimageworks.com

