




## ImagePro 8769 Portable LCD Projector

- 2500 lumen brightness
- XGA resolution
- Easy to transport, only 7.0 lbs.
- HDTV compatible
- Full set of features, 2 video inputs & 2 computer inputs
- Monitor loopthrough
- Switched Audio Output
- Automatic Keystone Correction

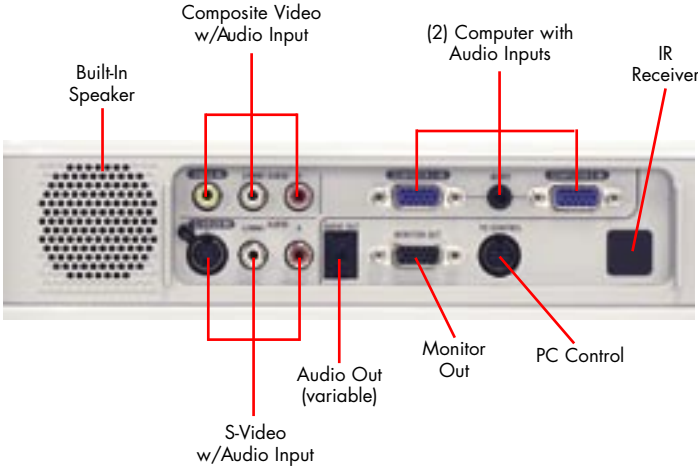

**8769**  
**DUKANE**

# ImagePro 8769

## Premium-quality LCD projector

The Dukane ImagePro 8769 is an ultra-portable projector that makes presentation setup fast and easy. Automatic keystone correction, one touch source selection, and color coded connections will ensure a confident carefree presentation every time.

This full-featured LCD projector is ideal for classrooms, conference rooms or other locations where a bright image is required. Use it as a portable or mount it on the ceiling.



### Key features:

- XGA (1024 x 768) resolution
- 2500 ANSI Lumens of brightness
- Vibrant rich colored images
- Easy carry 7.0 lbs.
- Flexibility with 2 computer and 2 video inputs
- Full function remote with mouse/cursor control
- Audio output switches with selection of either video or computer source
- HDTV compatible
- "Silent Running" so you hear only your message
- Automatic vertical keystone correction
- Three Year Warranty and One Year Peace of Mind Service

### 8769 Projection Table

Image Size 4:3		Throw Distance	
Diagonal	Width	Min	Max
Inches	Inches	Inches	Inches
30	24	34.1	41.6
60	48	69.7	84.6
80	64	93.4	113.2
100	80	117.1	141.9
120	96	140.8	170.6
150	120	176.3	213.6
200	160	235.6	285.2
300	240	354.1	428.5

Throw ratio 1.5-1.8:1 (distance:width)

# DUKANE

Audiovisual Products  
2900 Dukane Drive  
St. Charles, Illinois 60174  
www.dukcorp.com/av



Toll-free: 800-676-2485  
Fax: 630-584-5156  
E-mail: avsales@dukcorp.com

### Specifications

Image Element	0.7" polysilicon TFT x3, MLA
Brightness	2500 ANSI lumens (1900 lumens in Whisper Mode)
Resolution	1024 x 768 pixels (H X V), XGA
Contrast	400 to 1
Scanning Frequency	fh 15-100 kHz, fv 50-120 Hz
Lens	Manual zoom, 1.2X Optical
Lens Throw Ratio	1.5 -1.8 to 1 throw distance to image width
Keystone Correction	Digital, vertical +/-30 deg, Automatic
Aspect Ratio	4:3, 16:9 selectable
Computer Compatibility	SVGA, VGA, XGA, and SXGA/UXGA Compressed, Mac 13" and Mac 16"
Video Compatibility	NTSC, NTSC 4.43, PAL, PAL-M, PAL-N, PAL60, SECAM, HDTV 1080i, 720p, 576p, 480i/p
Image Control	Freeze function, electronic magnification and pan
Mouse Control	IR remote mouse receiver, USB to PC
Projection Modes	Front/rear/ceiling
Color Reproduction	24 bit (16.7 million)
Lamp	200W UHP
Lamp Life	2000 hours, 3000 in whisper mode
Audio	1 speaker , 1 watt
Throw Distance	29" to 430"
Screen Size, diagonal	21" to 300"
Inputs, Video	S-video, Min DIN 4-pin, with L/R RCA Audio, Composite video, RCA x 1, with L/R RCA Audio
Inputs, Computer	(2) RGB Signal: D-sub, 15 pin with stereo mini audio
Outputs Monitor	15 pin, D-sub
Inputs, Control	PC control DIN 8 pin
Outputs Audio	Stereo mini jack (variable audio out)
Security	Kensington slot
Fan Level	35 dB, Ultra quiet 30dB in Whisper Mode
Operating Temperature	41 to 95 deg. F (5-35 deg C)
Power	AC 100-120V, AC200-240V 50/60 Hz, 250W (normal), 200W (whisper), 8W standby
Size (WxHxD)	11.6" x 3.7" x10.2"
Weight	7.0 lbs.
Shipping Weight	12.6 lbs.
Carton Size	14.7" x 11" x 17.3"
Accessories Included	Remote control, batteries, power cord, computer cable, remote mouse receiver, operator's manual and soft carry case
Safety	UL/CSA, FCC Class B
Optional Accessories	Lamp 456-8767A Rolling briefcase; 185-406, Ceiling mount, universal; RPA-U

### Three (3) year limited warranty

on parts and labor in North America, lamp excluded (for other locations, local warranties apply).

Includes Dukane's FREE 1 year Peace-of-Mind Loaner Program.

# 3YR