




## ImagePro 8805 Portable LCD Projector

- 3400 lumen brightness
- XGA resolution
- 800 to 1 contrast ratio
- Full connectivity
- Two PC card slots
- Quick install optional lenses
- Power zoom & auto focus
- Digital keystone correction
- Optional Wireless and wired LAN
- Automatic color correction
- Enhanced security features

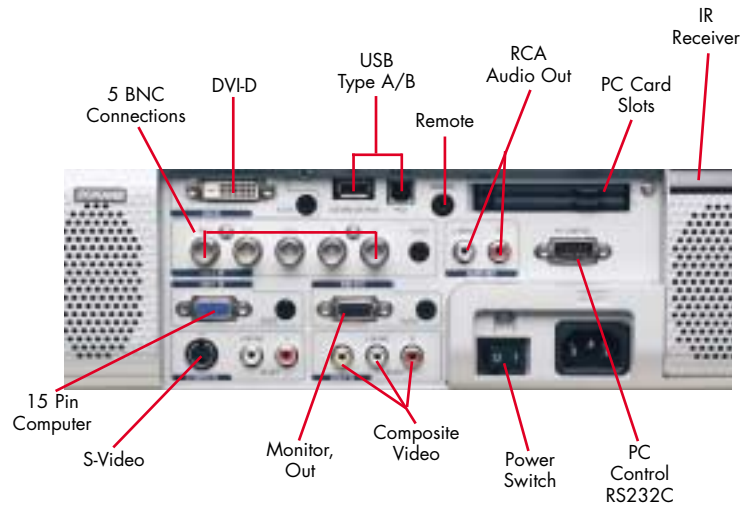

# 8805 DUKANE

# ImagePro 8805

## Portable LCD projector

The Dukane ImagePro 8805™ is a versatile solution for the most demanding presentation requirements. Providing realistic colors, sharp contrast, and super bright images, the 8805 is sure to impress.

Auto focus, power zoom, and automatic color corrections make set up and operation fast and easy. Flexible connectivity, networking capability, and enhanced security features make the 8805 a great choice for classrooms, conference rooms, or other locations where a bright image is required.

From the lens to the connector panel, our environmentally friendly projector is precision crafted for performance, quality and long-term reliability.



### Key features:

- 3400 lumen brightness
- XGA resolution
- 800 to 1 contrast ratio
- Full connectivity
- PC card slots
- Quick install optional lenses
- Lamp access on top of projector for easy changing in ceiling mounted applications
- Power zoom & auto focus
- Digital keystone correction
- Optional Wireless and wired LAN
- Automatic color correction
- Enhanced security features
- Three year warranty and One year Peace-of-Mind service

# DUKANE

Dukane Corporation  
 Audio Visual Products Division  
 2900 Dukane Drive  
 St. Charles, Illinois 60174  
 800-676-2485  
 630-584-5156  
 avsales@dukcorp.com  
 www.dukcorp/av.com



toll-free  
 fax  
 e-mail

ImagePro is a registered trademark of Dukane Corporation  
 #11631-B-05

### Specifications 8805

Image Element	1.0" polysilicon TFT x 3, MLA
Brightness	3400 ANSI lumens (2700 lumens in Whisper Mode)
Resolution	1024 x 768 pixels (H X V), XGA
Contrast	800:1
Scanning Frequency	fh 15-100 kHz, fv 48-120 Hz
Lens	Power zoom and focus F=1.74-2.18, Auto focus
Lens Throw Ratio	1.5-2.1:1 throw distance to image width
Keystone Correction	Digital, vertical +/-40 deg., horizontal +/-27 deg.
Aspect Ratio	4:3, 16:9, selectable
Computer Compatibility	SVGA, VGA, XGA, and SXGA/UXGA Compressed Mac 13" and Mac 16"
Video Compatibility	NTSC, NTSC 4.43, PAL, PAL-M, PAL-N, PAL60, SECAM, HDTV 1080i, 1080i/50 Hz, 720p, 576p, 480i/p
Component Video, Image Control	Comp, horz res, 800TV line Freeze function, electronic magnification and pan
Mouse Control	Using USB
Projection Modes	Front/rear/ceiling
Color Reproduction	24 bit (16.7 million)
Lamp	275W NSH
Lamp Life	2000 hours, 3000 in whisper mode
Audio	2 x 5W with volume, bass, treble control
Throw Distance	29" to 826"
Screen Size, diagonal	25" to 500" diagonal
Inputs, Video	(1) Component, BNC x 3 (1) S-video, Min DIN 4-pin, with RCA audio (1) Composite video, with L/R RCA audio (1) Audio, Stereo, RCA x 2
Inputs, Computer	(1) DVI, with audio stereo mini jack (1) RGB Signal: D-sub, 15 pin and audio stereo mini jack (1) RGB Signal: 5-BNC (2) PC Card slot
Outputs Monitor	15 pin, D-sub with audio stereo mini jack
Outputs, Control	PC control DIN 8 pin, RS-232 Audio out, stereo, RCA x 2 Remote, mini jack, USB Type A & B
Security	Kensington slot and password
Fan Level	39dB, 34dB in whisper mode
Operating Temperature	32 to 95 deg. F (0-35 deg C)
Power	AC 100-120V, AC200-240V 50/60 Hz, 390 watt
Size (WxHxD)	13.2" x 4.6" x 12.8"
Weight	13 lbs.
Shipping Weight	22 lbs.
Carton Size	20" x 14" x 20"
Accessories Included	Remote control w/ laser pointer, power cord, computer cable, USB cable, remote control cable, CDROM, operators manual, USB mouse
Safety	UL/CUL, FCC Class B
Optional Accessories	Lamp 456-8805, Ceiling mount, universal; PJF-UNV-S

Three (3) year limited warranty on parts and labor in North America, lamp excluded (for other locations, local warranties apply). Includes Dukane's FREE 1 year *Peace-of-Mind Loaner Program*.

# 3YR