




ImagePro 9060 Powerful LCD Projector

- Super 6000 lumen brightness
- XGA resolution (scales to UXGA)
- Boardroom, house of worship, auditorium or rental/stage event
- Complete set of features
- Power zoom and focus
- Separate, moveable lenses
- LAN, Wireless, and RS-232 operation
- 2 or 1 lamp operation

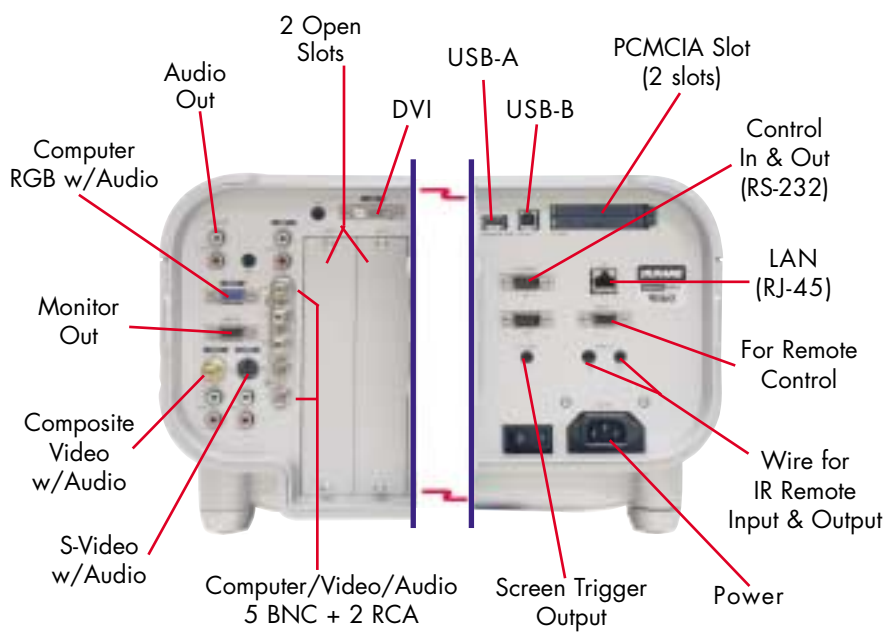

9060
DUKANE

ImagePro 9060 Powerful LCD projector

A new way of thinking about projection

The Dukane ImagePro 9060 is a projector that has the light output and functions for a superior installation or event. It has the very latest in image processing and enhancement technology to provide the perfect image in sharpness, color, and contrast.

With all possible interconnect features this projector can be installed and will operate almost anywhere. You can connect virtually any source and be assured an outstanding image. The projector can be controlled or monitored via a number of ways including over a local area network (LAN). It gives you the perfect presentation.



Key features:

- Super bright 6000 lumens
- XGA (Scaled UXGA)
- Great Computer and video images
- Choice of lenses with lens shift
- Keystone and off-center position correction
- Image enhancement and Faroudja DCDi™
- Wireless and LAN operation/networking
- Two PC MCIA slots for program memory
- Security locks and password protection
- Dual lamps with extended life options
- Screen trigger, monitor, and audio outputs

LENS OPTIONS		Throw	Image Size,
Lens No.	Desc.	Distance, ft.	Diagonal, in.
GT10RLB	Lens F2.4, f=28.9mm, No-offset	2.5-16.6	40-250
GT13ZLB	Lens F2.3-2.8, f=34.5-42.5mm	3.0-29.5	40-300
GT20ZL	Lens F1.8-2.5, f=57.4-74.7mm	5.0-52.1	40-300
GT24ZLB	Lens F2.5-3.2, f=64-93.8mm	8.4-86.7	60-400
GT34ZLB	Lens F2.5-3.3, f=93.5-140.3mm	16.7-163.1	80-500

Specifications

Image Element	1.4" polysilicon active-matrix TFT x3, with microlens array
Brightness	6000 ANSI lumens std.mode, dual lamp 4800 ANSI lumens eco-mode, dual lamp
lamp,	3000 single lamp, 2400 eco-mode
Resolution	1024 x 768 pixels (H X V)
Contrast	700 to 1
Scanning Frequency	Horz. 15-100 kHz, Vert. 48-120 Hz
Pixel clock Frequency	160 MHz
Lens	Power zoom and focus, selectable lenses

DUKANE



Audiovisual Products
2900 Dukane Drive
St. Charles, Illinois 60174
www.dukcorp.com/av

Toll-free: 800-676-2485
Fax: 630-584-5156
E-mail: avsales@dukcorp.com

Specifications continued

Lens Throw Ratio	See table. Power lens shift in vert.and hoz.
Lens shift	0.5 image height, 0.32 width for GT20ZL lens
Keystone Correction	Vertical +/-40 deg, Horz +/- 30 deg
Aspect Ratio	Selectable
Computer Compatibility	SVGA, VGA, XGA, plus SXGA to UXGA Compressed, Mac 13" and Mac 16"
Video Compatibility	NTSC, NTSC 4.43, PAL,PAL-M, PAL-N, PAL60, SECAM, HDTV 1080i, 720p, 480p, 480i
Component Video, Image Control	Component, Y/Cb/Cr, 800 TV lines Freeze function, electronic magnification and pan
Projection Modes	Front/rear/ceiling
Color Reproduction	24 bit (16.7 million)
Lamp	275W NSH, dual lamp system
Lamp Life	1500 hr std. Mode, 2000 hr. eco-mode, Extended life lamp has 4500 hr.
Audio	2 speaker , 5 watt each
Throw Distance	See table
Image Size, diagonal	See table
Inputs, Video and Audio	(1) Component, BNC x 3, and stereo audio, RCA x 2, shared (2) S-video, Min DIN 4-pin, and stereo audio, RCA x 2 (3) composite video, BNC x 1, and stereo audio, RCA x 2 (4) RGB Signal:BNC x 5, and stereo audio, RCA x 2, shared (5) RGB Signal: D-sub, 15 pin and audio stereo mini jack (6) DVI 24 pin and audio, stereo mini jack
Inputs, Computer w/audio	
Outputs	RGB out, 15 pin D-sub, for monitor Audio out, stereo, RCA x 2
Open slots for input	2 slots
Other Terminals	USB for mouse/Hub, typeA; USB for PC, type B; PC card slot (PCMCIA) x 2; Mini D-sub 9 pin, in, RS-232; Mini D-sub 9 pin, out, RS-232
Control of screen	Screen trigger, mini jack, to raise/lower screen; LAN port RJ-45 Remote 1, mini D-sub 15 pin for contact closure control Remote 2, mini jacks x 2, in and out for remote control
Remote control, wired	
Security	Password protection can be set
Fan Level	45dB std., 40dB eco-mode, 40 dB ext eco-mode
Operating Temperature	32 to 95 deg. F (0-35 deg C)
Power	AC 100-120V, AC200-240V
Size (WxHxD)	20.4" x 9.5" x 21.6"
Weight	40.6 lbs.
Shipping Weight	54 lbs., lens 6 lbs.
Carton Size	26" x 17" x 24", lens 10" x 10" x 14"
Accessories Included	Remote control, batteries, power cord, wired remote cable, operator's manual and CD Rom
Safety	UL/CUL, FCC Class B
Optional Accessories	Lamp 456-9060: Extended life Lamp 456-9060E Remote control, Lenses
Warranty	3 years, lamp 1000 hr. or 6 mo

Three (3) year limited warranty

on parts and labor in North America, lamp excluded (for other locations, local warranties apply).

3YR